


Model No : FY022



Input volt: 12V

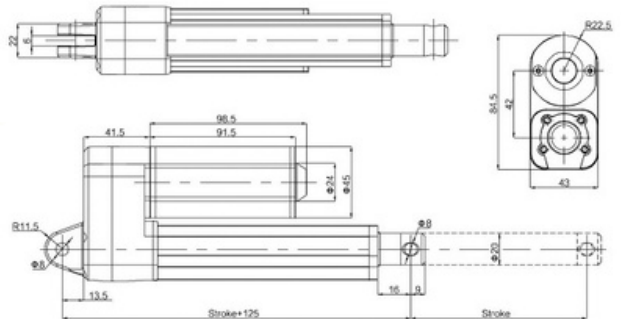

Other Specification :

Specification	Details
Free load speed	7mm/s
Load Capacity	2500N
Protection Class	IP 65
Mode of Operation	PUSH / PULL
Operating Temperature	-15°C to 45°C
Duty Cycle	10%, 2min. on / 18min. off
Stroke Length	50mm

Applications:

Features :

- MATERIAL HANDLING,
- FACTORY AUTOMATION,
- PACKAGING & CONVERTING
- COMPACT DESIGN,
- ALUMINIUM FRAME & EXTENSION TUBE,
- BUILT-IN LIMIT SWITCH,
- LOW NOISE,
- ELECTRICAL OPERATION ONLY